

USER INSTRUCTIONS

Product Ref: Thermal 7

Sizes Available: 8, 9, 10, & 11

Manufacturer:

HIMALYAN TRADING (T/A SupremeTTF) LTD
Unit C
Studham Place
Common Road
Dunstable
LU6 2FU

These products are classed as Personal Protective Equipment (PPE) by the Personal Protective Equipment Regulations (Regulation (EU) 2016/425 as adopted into UK law) and also by the European PPE Regulation (EU) 2016/425 and have been shown to comply with these Regulations through the Harmonized British and European Standards EN ISO 21420:2020 ; EN388:2016+A1:2018

Care: Before removal, gloves should be cleared of any contamination.

Storage: When not in use, store the product in a dry place away from direct sunlight, sources of contamination and extremes of temperature.

Handling: New and used gloves should be thoroughly checked for signs of wear or damage (e.g. cuts or holes) before use. Do not use damaged gloves.


Performance and limitation of use – This product has been tested in accordance with:

BS EN 388:2016+A1:2018 and BS EN ISO 21420:2020 (See table below)

BS EN388:2016+A1:2018:

Tested in accordance with BS EN388:2016	Requirement	Level
	(6.1) Abrasion resistance	2
	(6.2) Blade cut resistance	1
	(6.4) Tear resistance	3
	(6.5) Puncture resistance	2
	(6.3) TDM Cut resistance	X
	(6.6) Impact protection	

BS EN 388:2016+A1:2018

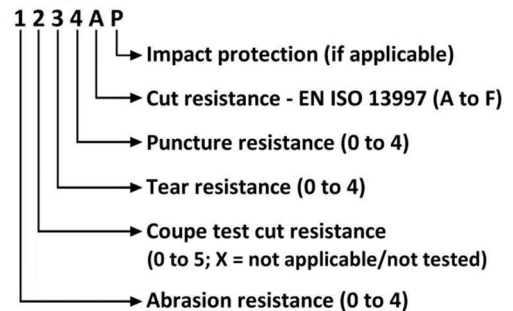

BS EN388:2016 levels are based on the table below:

TEST	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4	LEVEL 5	
6.1 Abrasion resistance (number of rubs)	100	500	2000	8000	-	
6.2 Coupe test: Blade cut resistance (index) ^{1, 2}	1.2	2.5	5.0	10.0	20.0	
6.4 Tear resistance (N)	10	25	50	75	-	
6.5 Puncture resistance (N) ³	20	60	100	150	-	
Levels of performance for materials tested with EN ISO 13997						
TEST	LEVEL A	LEVEL B	LEVEL C	LEVEL D	LEVEL E	LEVEL F
6.3 TDM: cut resistance (N) ^{1, 2}	2	5	10	15	22	30
Levels of performance tested according to EN 13594:2015, 6.9 with impact energy of 5 J						
TEST	PASS	NOT TESTED / FAIL				
Impact protection ⁴	P	<BLANK> - No code or text is added if not tested or test failed				

See notes overleaf

Test results relate to the palm area of the glove unless otherwise stated

NOTE 1: For dulling during the cut resistance test (6.2), the coupe test results are only indicative while the TDM cut resistance test (6.3) is the reference performance result.

NOTE 2: There is no correlation between the levels of performance obtained with the 6.2 and 6.3 test methods.

NOTE 3: Gloves meeting the requirements for resistance to puncture may NOT be suitable for protection against sharply pointed objects such as hypodermic needles.

NOTE 4: Each area where impact protection is claimed shall be tested. Due to the test method (test specimen dimensions), protection against impacts on fingers cannot be tested. When the requirements of the impact test are fulfilled by the gloves, the marking code 'P' is added after the five performance levels number, otherwise no code is added.

The sign X, instead of a number, means that the glove is not designed for the use covered by the corresponding test.

Notes:

- (a) Gloves are made of 7 Gauge orange thermal liner with Crinkle Latex coated at palm & fingertips.*
- (b) Gloves are designated for protection against mechanical risks. Cat II Intermediate risk only. See performance data.*
- (c) Protection is limited to part of the hand only.*
- (d) Not suitable for use where there is a risk of entanglement (for example near moving machinery), chemical risk or electrical risk.*
- (e) These gloves are not suitable for washing. Do not launder or wash. Gloves can be cleaned using a damp cloth or similar.*
- (f) Some gloves may contain ingredients, such as natural rubber latex and accelerators which could potentially cause irritation / allergic reaction. In case of any adverse reaction / irritation, seek medical advice*
- (g) Retain these instructions for future reference.*

Further information

Notified Body: 2575

INTERTEK

INTERTEK ITALIA SpA Via Miglioli, 2/A
Cernusco sul Naviglio (MI), Italy
Lyin Cedex

UKCA Certificate Number: ITASLNB24015413

Declaration of Conformity can be downloaded from our website: www.supremettf.com